



## **REFURBISHED FRESenius 4008H DIALYSIS MACHINE**

Backed by the use of ongoing technologies and tools, we are engaged in offering a quality approved range of **Refurbished Dialysis Machine** to the clients. These machines are developed and are highly recommended in corporate hospitals and private dialysis centers.

These machines are imported from France and Germany from our principal supplier. These machines are checked, upgraded, and refurbished by the authorized suppliers. We import and take it to our workstation at Atgaon, Maharashtra, India. Where these machines are again checked and recalibrated. All refurbished dialysis machines are passed through all the parts testing and dummy dialysis for several days. Once the machines successfully pass all tests conducted by our expert Biomedical engineers, these machines are installed in dialysis centers.

Through continuous optimization of the treatment modalities Fresenius Medical Care always aims to offer patients the best renal replacement therapy to increase their well-being and quality of life.

Our hemodialysis system 4008H ensures the safety and efficiency of all-important treatment modalities within the scope of renal replacement therapies, such as:

- Bicarbonate dialysis
- Single-Needle or SN Click-Clack
- Ultrafiltration and Sodium profiles
- ISO-UF Program
- ONLINE Hemodialysis filtration


### **Features:**

- Scratch-free
- Durable
- Reliable

### **Specifications:**

- Dimensions: 1330 x 495 x 340 mm
- Weight: approx 80 kg
- Water Supply:
- Inlet Pressure: 1.5-6.0 bar
- Water Inlet Temperature: 5-30° C
- Electrical Data:
- Power Supply: 230 v-10% 50 Hz
- Current Consumption: max 9 A
- Extra Corporeal Circuit:

- Arterial Pressure: Display Range: -300 mmhg to 280 mmhg
- Accuracy: /\_ 10 mmhg
- Resolution: 20 mmhg
- Venous Pressure Monitoring:
- Display Range: -60 mmhg to 520 mmgh
- Accuracy: /- 10 mmhg
- Resolution: 20 mmhg
- Trans Membrane Pressure:
- Display range: -60 mmhg to 500 mmhg
- Resolution: 20 mmhg
- Arterial Blood Pump:
- Blood Flow Range: 10-600 ml/min
- Accuracy: /- 10%
- Air Bubble Detector: By ultra sound transmission, additional optical monitoring
- Delivery Range: 0 to 10 ml
- Bolus Function: max 5 ml per bolus
- Syringe Size: 20 ml ,30 ml and 50 ml
- Dialysate Fluid Circuit:
- Selectable: 0-300-500 ml/min

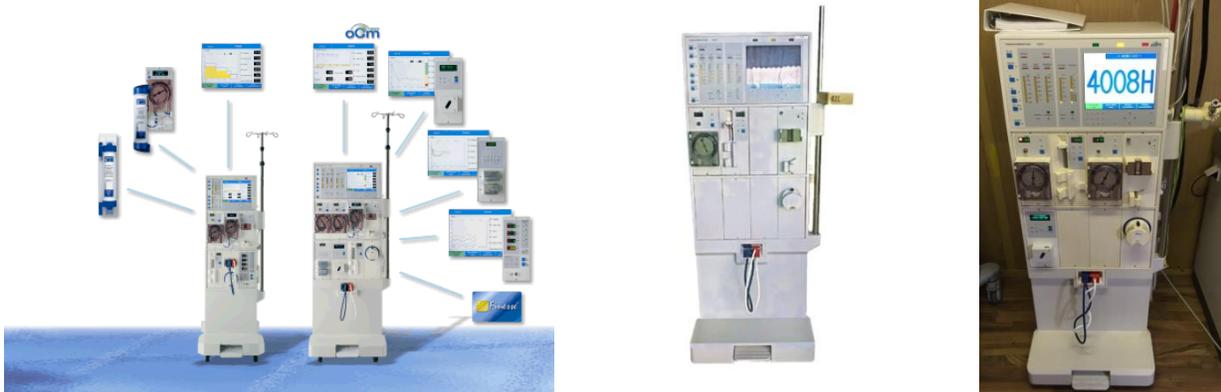

**FEEL FREE CONTACT US -**

**Vishal Thakkar**

**Export Manager**

+91-9619484952/9773481345

WhatsApp us - <https://wa.me/919619484952>

**Hemant Surgical Industries Ltd.**

502, 6th Floor, Ecstasy Business Park, City Of Joy,

JSD Road, Mulund West Mumbai - 400080

[sales@hemantsurgical.com](mailto:sales@hemantsurgical.com)

[www.hemantsurgical.com](http://www.hemantsurgical.com)

<https://linktr.ee/hemantsurgical>